


STEP D FOR EACH LAYER OF FLEECE APPLY A 2ND (TOP COAT) OF LIQUISEAL Liquid Flashing Resin, PER PUBLISHED COVERAGE RATE ENSURING THE FLEECE IS COMPLETELY SATURATED


STEP C IMMEDIATELY PRESS LIQUISEAL Flashing Fleece, INTO THE APPLIED LIQUISEAL Liquid Flashing Resin TAKING CARE AT CORNERS AND TIGHT SPACES

STEP B APPLY BASE LAYER OF LIQUISEAL Liquid Flashing Resin PER PUBLISHED COVERAGE RATE

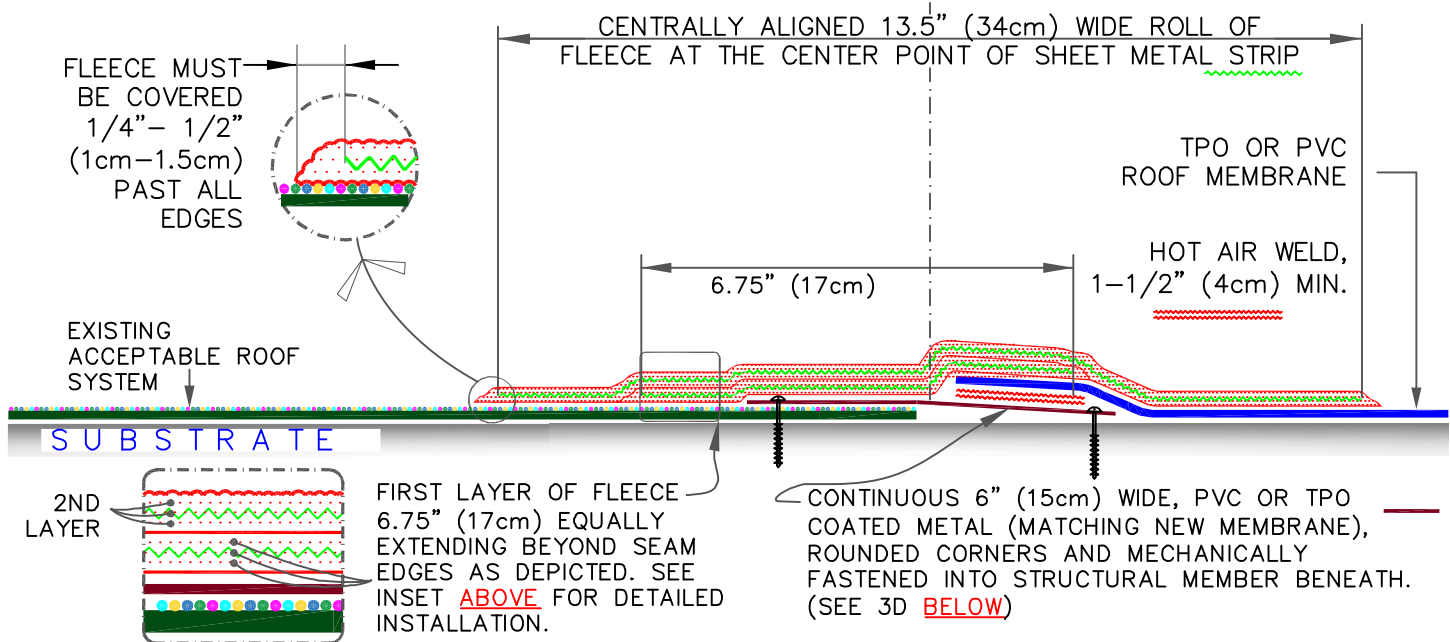

## NOTES:


1. REFER TO ATTACHMENTS 1 & 2 FOR DETAILED INSPECTION, CLEANING AND PRIMING FOR DIFFERENT MATERIALS WITHIN THE FLASHING AREAS.
2. IF FLUTES ARE PERPENDICULAR DRILL A 3/8" (1cm) WEEP HOLE IN THE BOTTOM FLUTES OF THE STEEL DECK ALONG THE TIE IN.
3. DETAIL NOT FOR USE ON WARRANTY PROJECTS EXCEEDING 20-YEARS. UNLESS OTHERWISE SPECIFIED.

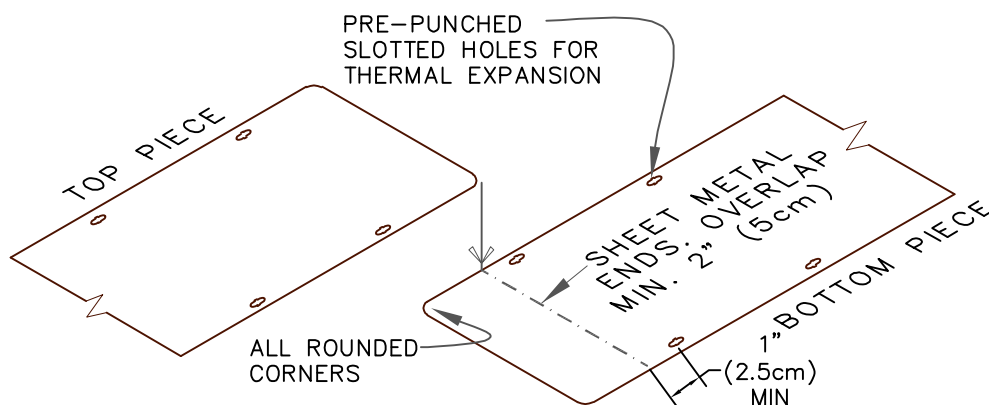

	ROOF MEMBRANE
	LIQUISEAL Flashing Fleece
	LIQUISEAL Liquid Flashing Resin
	SEE NOTE(S)

TPO OR PVC MEMBRANE TIE-IN WITH EXISTING ROOF OVER STEEL DECK  
(PAGE 1 OF 2)

For additional information, refer to Specifications



DETAIL NO.

LF-13.2

LIQUID FLASHING