



OPTIONAL: SEAM PLATE/FASTENER MAY BE INSTALLED INTO THE STRUCTURAL DECK UP TO 6" (15cm) FROM ANGLE CHANGE.

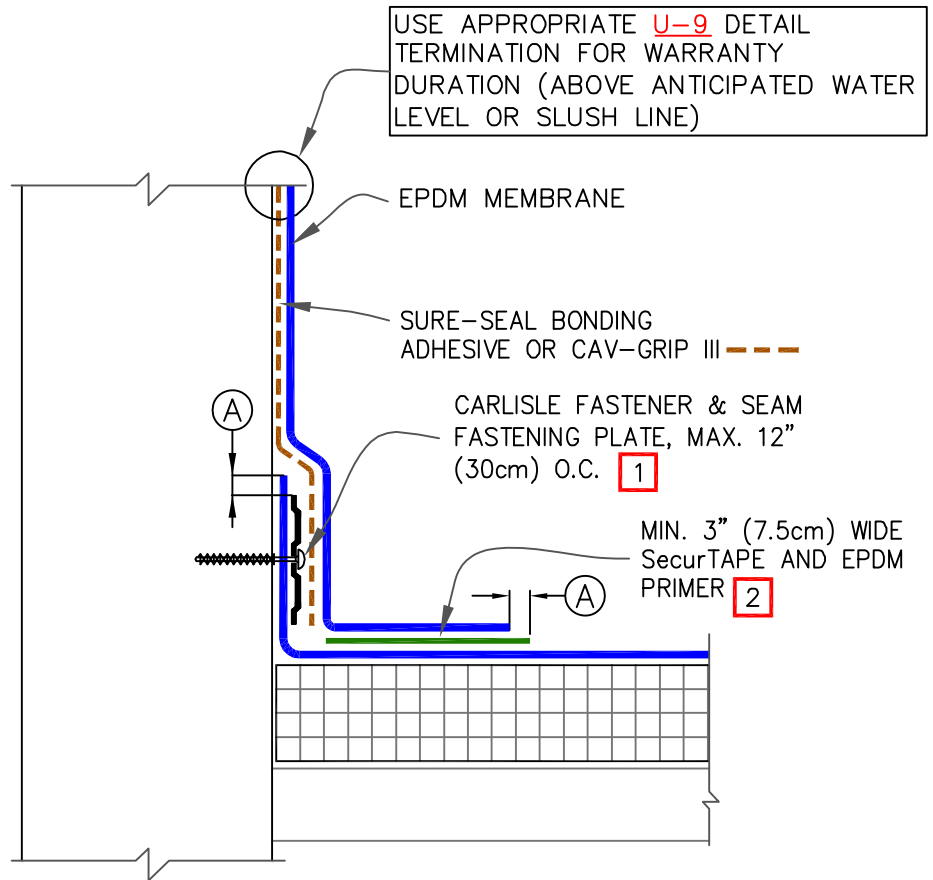

DIMENSIONS		cm	
(A)	1/8"	0.5	TO
	1/2"	1.5	MAX.
(B)	3"	7.5	

NOTES:

- FASTENERS AND PLATES ARE REQUIRED AT 6"(15cm) O.C. FOR ADHERED SYSTEMS WITH WARRANTY WIND SPEED COVERAGE GREATER THAN 90 MPH AND FOR ALL PROJECTS WITH WARRANTIES GREATER THAN 20 YEARS. HP FASTENERS AND POLYMER SEAM PLATES ARE REQUIRED OVER STEEL DECKS ON MECHANICALLY FASTENED SYSTEMS.
- USE 6" (15cm) WIDE SecurTAPE FOR 30-YEAR WARRANTY. LAP SEALANT IS REQUIRED ON CUT EDGES OF REINFORCED MEMBRANE.
- PROJECTS WITH 30-YEAR WARRANTY OR WHEN USING 90-MIL MEMBRANE, REFER TO [DETAIL U-2C.](#)

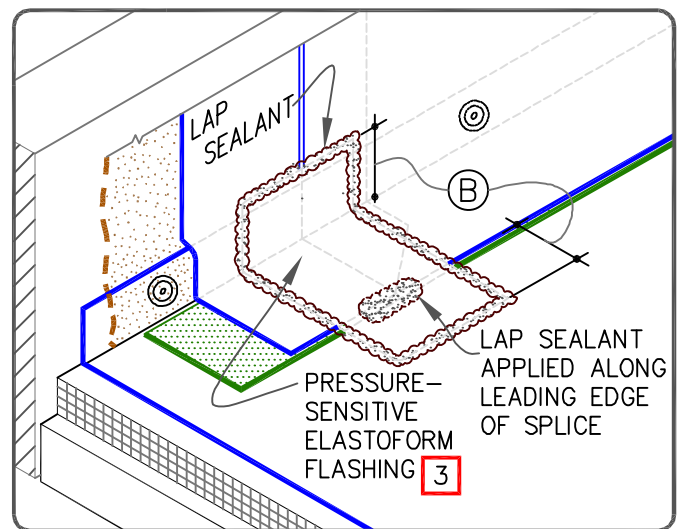

PARAPET / CURB WITH SEPARATE MEMBRANE FLASHING

MAXIMUM WARRANTY: 30 YEARS



DETAIL NO.

U-12B

U (UNIVERSAL DETAIL)