


NOTES:

1. REFER TO TABLES ON [SHEETS ATTACHMENT 1-2](#) FOR DETAILED INSPECTION, CLEANING AND PRIMING FOR DIFFERENT MATERIALS WITHIN THE FLASHING AREAS.
2. DETAIL NOT FOR USE ON WARRANTY PROJECTS EXCEEDING 20-YEARS. UNLESS OTHERWISE SPECIFIED.
3. PROPERLY FILL THE JOINTS, VOIDS AND CRACKS ENSURING PROPER SEAL AGAINST WATER MIGRATION.
4. APPLICABLE SEAM DETAILS:
 - 4.1. EPDM: [VGC-2.1 & VGC-2.1A](#)
 - 4.2. TPO/PVC/KEE: [TPC-2.1](#)

DIMENSIONS		cm	
(A)	3"	7.5	MIN.
(B)	2-3"	5-7.5	MIN.
(C)	AS REQUIRED DEPENDING ON SUBSTRATE, BUT MIN. 4" (10cm).		



MEMBRANE TIE-IN WITH EXISTING ROOF OVER CONCRETE DECK

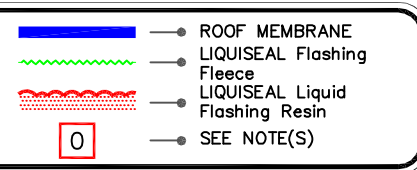

LIQUID FLASHING
LF-13.3