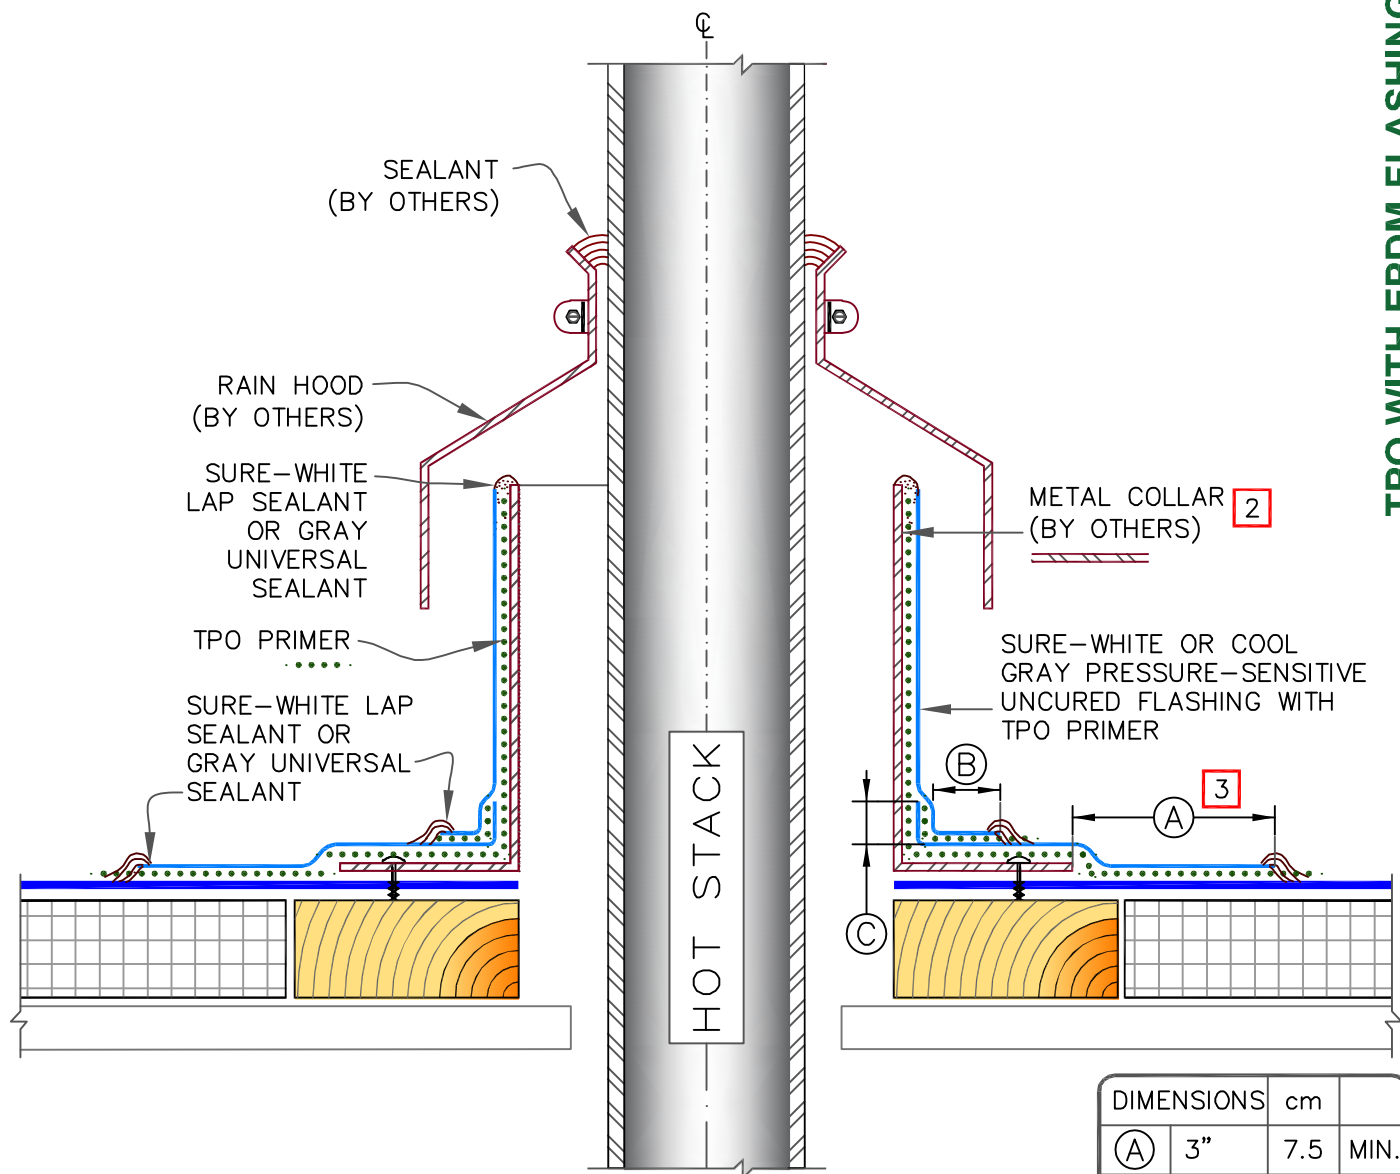


WARRANTY
REQUIREMENTS

20 YEAR WARRANTY

SEE DETAIL BELOW

25 OR 30 YEAR WARRANTY

REFER TO CARLISLE TPO DETAIL [U 8.6](#).

TPO WITH EPDM FLASHING

NOTES:

1. REMOVE ALL LEAD AND OTHER FLASHING BEFORE INSTALLING FIELD FABRICATED PIPE SEAL.
2. TEMPERATURE OF METAL COLLAR MUST NOT EXCEED 180°F (82°C).
3. TPO PRIMER MUST BE APPLIED TO THE MATING SURFACES PRIOR TO APPLYING SURE-WHITE OR COOL GRAY PRESSURE-SENSITIVE UNCURED FLASHING.
4. IN COLDER TEMPERATURES, A HEAT GUN MUST BE USED WHEN FORMING PRESSURE-SENSITIVE UNCURED FLASHING.

HOT STACK: FIELD FABRICATED FLASHING
WITH EPDM PS ELASTOFORM FLASHING

WARRANTY: SEE TABLE ON TOP OF PAGE



DETAIL NO.

U-8DT