

# VersiCore® Polyiso Insulation




## Packaging & Weight

Size	LTR	PCS/ PL	LBS/4X12 PC	LBS/4X8 PC	LBS/4X4 PC	LBS/4x12 PL	LBS/4X8 PL	LBS/4X4 PL	4X12 SF/ PL	4x8 SF/ PL	4x4 SF/ PL	SF/48' TRL	Weight Per SF
0.5	2.8	96	7.63	5.09	2.54	732.67	488.45	244.224	-	3072	1536	73728	0.16
1.0	5.7	48	11.23	7.49	3.74	539.14	359.42	179.712	-	1536	768	36864	0.23
1.1	6.3	43	11.95	7.97	3.98	513.94	342.62	171.312	-	1376	688	33024	0.25
1.2	6.8	40	12.67	8.45	4.22	506.88	337.92	168.960	-	1280	640	30720	0.26
1.3	7.4	36	13.39	8.93	4.46	482.11	321.41	160.704	-	1152	576	27648	0.28
1.4	8.0	34	14.11	9.41	4.70	479.81	319.87	159.936	-	1088	544	26112	0.29
1.5	8.6	32	14.83	9.89	4.94	474.62	316.42	158.208	1536	1024	512	24576	0.31
1.6	9.1	30	15.55	10.37	5.18	466.56	311.04	155.520	1440	960	480	23040	0.32
1.7	9.7	28	16.27	10.85	5.42	455.62	303.74	151.872	1344	896	448	21504	0.34
1.75	10.0	27	16.63	11.09	5.54	449.06	299.38	149.688	1296	864	432	20736	0.35
1.8	10.3	26	16.99	11.33	5.66	441.79	294.53	147.264	1248	832	416	19968	0.35
1.9	10.8	25	17.71	11.81	5.90	442.80	295.20	147.600	1200	800	400	19200	0.37
2.0	11.4	24	18.43	12.29	6.14	442.37	294.91	147.456	1152	768	384	18432	0.38
2.1	12.0	22	19.15	12.77	6.38	421.34	280.90	140.448	1056	704	352	16896	0.40
2.2	12.6	21	19.87	13.25	6.62	417.31	278.21	139.104	1008	672	336	16128	0.41
2.3	13.2	20	20.59	13.73	6.86	411.84	274.56	137.280	960	640	320	15360	0.43
2.4	13.8	20	21.31	14.21	7.10	426.24	284.16	142.080	960	640	320	15360	0.44
2.5	14.4	19	22.03	14.69	7.34	418.61	279.07	139.536	912	608	304	14592	0.46
2.6	15.0	18	22.75	15.17	7.58	409.54	273.02	136.512	864	576	288	13824	0.47
2.7	15.6	17	23.47	15.65	7.82	399.02	266.02	133.008	816	544	272	13056	0.49
2.8	16.2	17	24.19	16.13	8.06	411.26	274.18	137.088	816	544	272	13056	0.50
2.9	16.8	16	24.91	16.61	8.30	398.59	265.73	132.864	768	512	256	12288	0.52
3.0	17.4	16	25.63	17.09	8.54	410.11	273.41	136.704	768	512	256	12288	0.53
3.1	18.0	15	26.35	17.57	8.78	395.28	263.52	131.760	720	480	240	11520	0.55
3.2	18.6	15	27.07	18.05	9.02	406.08	270.72	135.360	720	480	240	11520	0.56
3.3	19.2	14	27.79	18.53	9.26	389.09	259.39	129.696	672	448	224	10752	0.58
3.4	19.9	14	28.51	19.01	9.50	399.17	266.11	133.056	672	448	224	10752	0.59
3.5	20.5	13	29.23	19.49	9.74	380.02	253.34	126.672	624	416	208	9984	0.61
3.6	21.1	13	29.95	19.97	9.98	389.38	259.58	129.792	-	416	208	9984	0.62
3.7	21.7	12	30.67	20.45	10.22	368.06	245.38	122.688	-	384	192	9216	0.64
3.8	22.3	12	31.39	20.93	10.46	376.70	251.14	125.568	-	384	192	9216	0.65
3.9	23.0	12	32.11	21.41	10.70	385.34	256.90	128.448	-	384	192	9216	0.67
4.0	23.6	12	32.83	21.89	10.94	393.98	262.66	131.328	-	384	192	9216	0.68
4.1	24.2	12	33.55	22.37	11.18	402.62	268.42	134.208	-	384	192	8448	0.70
4.2	24.9	12	34.27	22.85	11.42	411.26	274.18	137.088	-	384	192	7680	0.71
4.3	25.5	11	34.99	23.33	11.66	384.91	256.61	128.304	-	352	176	8448	0.73
4.4	26.1	10	35.71	23.81	11.90	357.12	238.08	119.040	-	320	160	7680	0.74
4.5	26.8	10	36.43	24.29	12.14	364.32	242.88	121.440	-	320	160	7680	0.76



# Tapered VersiCore Polyiso Insulation

## 48" x 48" Packaging & Weight

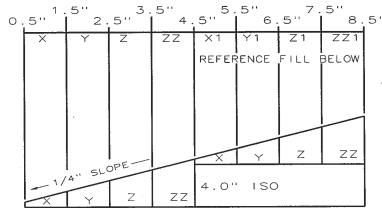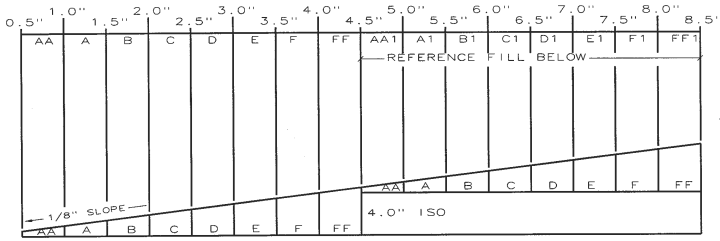


Board Style	LTR	Dimensions In Inches	BD FT Per Panel	PCS Per Bundle	SQ FT Per Bundle	Weight Per SF 20 psi	Weight Per SF 25 psi
AA	4.3	0.5" – 1.0"	12	64	1024	0.203	0.209
A	7.1	1.0" – 1.5"	20	38	608	0.282	0.292
B	10.0	1.5" – 2.0"	28	26	416	0.361	0.376
C	12.9	2.0" – 2.5"	36	20	320	0.440	0.459
D	15.9	2.5" – 3.0"	44	16	256	0.519	0.542
E	18.9	3.0" – 3.5"	52	14	224	0.599	0.626
F	22.0	3.5" – 4.0"	60	12	192	0.678	0.709
FF	25.2	4.0" – 4.5"	68	10	160	0.757	0.792
X	5.7	0.5" – 1.5"	16	48	768	0.242	0.251
Y	11.4	1.5" – 2.5"	32	24	384	0.401	0.417
Z	17.4	2.5" – 3.5"	48	16	256	0.559	0.584
ZZ	23.6	3.5" – 4.5"	64	12	192	0.717	0.751
G	8.6	1.0" – 2.0"	24	32	512	0.322	0.334
H	14.4	2.0" – 3.0"	40	18	288	0.480	0.501
I	20.5	3.0" – 4.0"	56	12	192	0.638	0.667
Q	8.6	0.5" – 2.5"	24	32	512	0.322	0.334
QQ	20.5	2.5" – 4.5"	56	12	192	0.638	0.667
XX	11.4	1.0" – 3.0"	32	24	384	0.401	0.417
SS	7.0	0.5" – 2.0"	20	38	608	0.282	0.292
TT	15.9	2.0" – 3.5"	44	16	256	0.519	0.542
S	10.0	1.0" – 2.5"	28	26	416	0.361	0.376
T	18.9	2.5" – 4.0"	52	14	224	0.599	0.626

\* Not all sizes are available to ship from Canada.



# SecurShield® Polyiso Insulation

## 48" x 48" Packaging & Weight

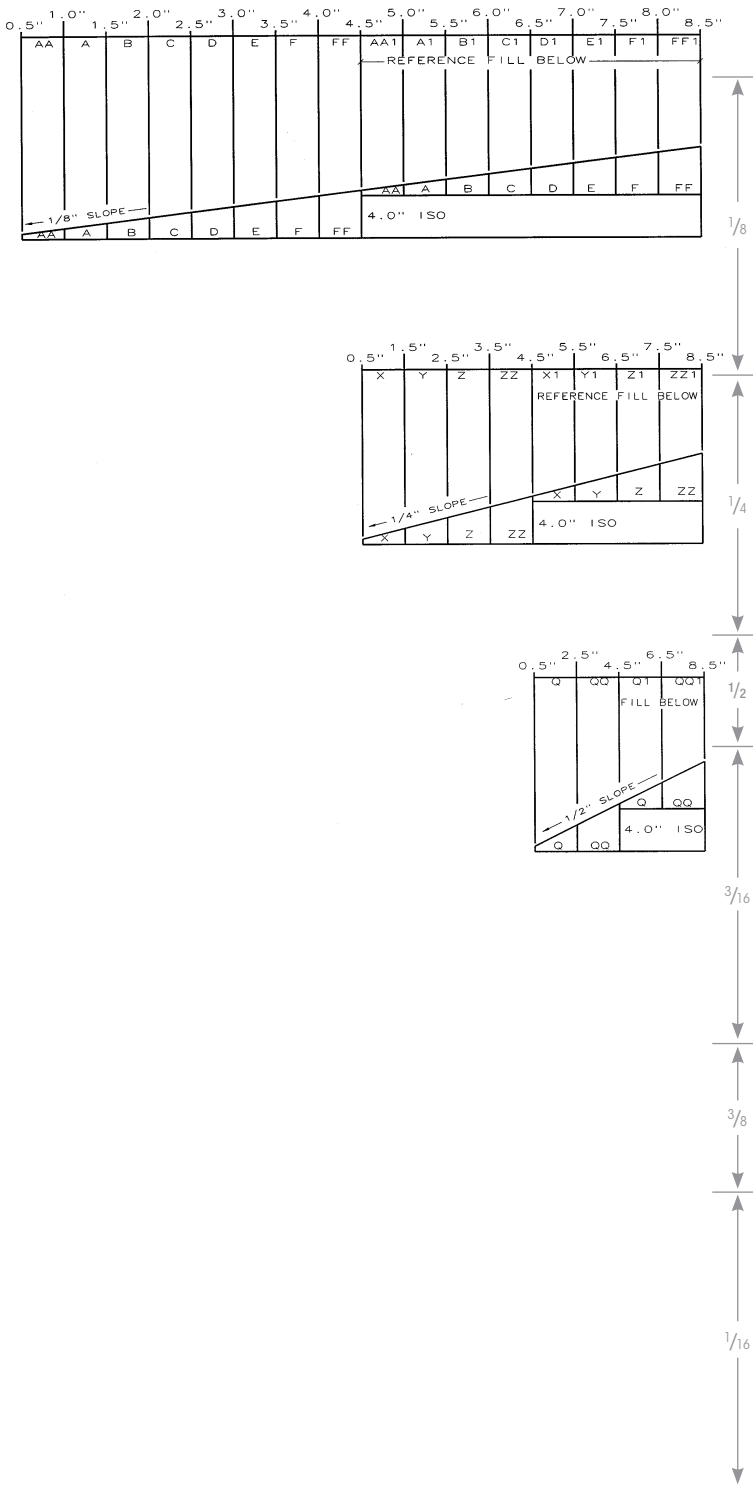

Board Style	LTRR	Dimensions In Inches	BD FT Per Panel	PCS Per Bundle	SQ FT Per Bundle	Weight Per SF 20 psi	Weight Per SF 20 psi
AA	4.3	0.5" - 1.0"	12	64	1024	0.319	0.325
A	7.1	1.0" - 1.5"	20	38	608	0.398	0.408
B	10.0	1.5" - 2.0"	28	26	416	0.477	0.492
C	12.9	2.0" - 2.5"	36	20	320	0.556	0.575
D	15.9	2.5" - 3.0"	44	16	256	0.635	0.658
E	18.9	3.0" - 3.5"	52	14	224	0.715	0.742
F	22.0	3.5" - 4.0"	60	12	192	0.794	0.825
FF	25.2	4.0" - 4.5"	68	10	160	0.873	0.908
X	5.7	0.5" - 1.5"	16	48	768	0.358	0.367
Y	11.4	1.5" - 2.5"	32	24	384	0.517	0.533
Z	17.4	2.5" - 3.5"	48	16	256	0.675	0.700
ZZ	23.6	3.5" - 4.5"	64	12	192	0.833	0.867
G	8.6	1.0" - 2.0"	24	32	512	0.438	0.450
H	14.4	2.0" - 3.0"	40	18	288	0.596	0.617
I	20.5	3.0" - 4.0"	56	12	192	0.754	0.783
Q	8.6	0.5" - 2.5"	24	32	512	0.438	0.450
QQ	20.5	2.5" - 4.5"	56	12	192	0.754	0.783
XX	11.4	1.0" - 3.0"	32	24	384	0.517	0.533
JJ	5.0	0.5" - 1.25"	14	54	864	0.339	0.346
KK	9.3	1.25" - 2.0"	26	28	448	0.457	0.471
LL	13.6	2.0" - 2.75"	38	20	320	0.576	0.596
MM	18.2	2.75" - 3.5"	50	14	224	0.695	0.721
J	7.8	1.0" - 1.75"	22	34	544	0.418	0.429
K	12.1	1.75" - 2.5"	34	22	352	0.536	0.554
L	16.6	2.5" - 3.25"	46	16	256	0.655	0.679
M	21.3	3.25" - 4.0"	58	12	192	0.774	0.804
SS	7.0	0.5" - 2.0"	20	38	608	0.398	0.408
TT	15.9	2.0" - 3.5"	44	16	256	0.635	0.658
S	10.0	1.0" - 2.5"	28	26	416	0.477	0.492
T	18.9	2.5" - 4.0"	52	14	224	0.715	0.742
1	3.6	0.5" - 0.75"	10	76	1216	0.299	0.304
2	5.0	0.75" - 1.0"	14	54	864	0.339	0.346
3	6.4	1.0" - 1.25"	18	42	672	0.378	0.388
4	7.8	1.25" - 1.5"	22	34	544	0.418	0.429
5	9.3	1.5" - 1.75"	26	28	448	0.457	0.471
6	10.7	1.75" - 2.0"	30	24	384	0.497	0.513
7	12.1	2.0" - 2.25"	34	22	352	0.536	0.554
8	13.6	2.25" - 2.5"	38	20	320	0.576	0.596

\* Not all sizes are available to ship from Canada.



# SecurShield Polyiso Insulation

## Packaging & Weight

Size	LTR	PCS/PL	LBS/4x8 PC	LBS/4x4 PC	LBS/4x8 PL	LBS/4x4 PL	4x8 SF/PL	4x4 SF/PL	SF/48' TRL	Weight Per SF
0.5	2.4	96	8.80	4.40	844.80	422.40	3072	1536	73728	0.28
1.0	5.7	48	11.20	5.60	537.60	268.80	1536	768	36864	0.35
1.1	6.3	43	11.68	5.84	502.24	251.12	1376	688	33024	0.37
1.2	6.8	40	12.16	6.08	486.40	243.20	1280	640	30720	0.38
1.3	7.4	36	12.64	6.32	455.04	227.52	1152	576	27648	0.40
1.4	8.0	34	13.12	6.56	446.08	223.04	1088	544	26112	0.41
1.5	8.6	32	13.60	6.80	435.20	217.60	1024	512	24576	0.43
1.6	9.1	20	14.08	7.04	281.60	140.80	960	480	23040	0.44
1.7	9.7	28	14.56	7.28	407.68	203.84	896	448	21504	0.46
1.75	10.0	27	14.80	7.40	399.60	199.80	864	432	20736	0.46
1.8	10.3	26	15.04	7.52	391.04	195.52	832	416	19968	0.47
1.9	10.8	25	15.52	7.76	388.00	194.00	800	400	19200	0.49
2.0	11.4	24	16.00	8.00	384.00	192.00	768	384	18432	0.50
2.1	12.0	22	16.48	8.24	362.56	181.28	704	352	16896	0.52
2.2	12.6	21	16.96	8.48	356.16	178.08	672	336	16128	0.53
2.3	13.2	20	17.44	8.72	348.80	174.40	640	320	15360	0.55
2.4	13.8	20	17.92	8.96	358.40	179.20	640	320	15360	0.56
2.5	14.4	19	18.40	9.20	349.60	174.80	608	304	14592	0.58
2.6	15.0	18	18.88	9.44	339.84	169.92	576	288	13824	0.59
2.7	15.6	17	19.36	9.68	329.12	164.56	544	272	13056	0.61
2.8	16.2	17	19.84	9.92	337.28	168.64	544	272	13056	0.62
2.9	16.8	16	20.32	10.16	325.12	162.56	512	256	12288	0.64
3.0	17.4	16	20.80	10.40	332.80	166.40	512	256	12288	0.65
3.1	18.0	15	21.28	10.64	319.20	159.60	480	240	11520	0.67
3.2	18.6	15	21.76	10.88	326.40	163.20	480	240	11520	0.68
3.3	19.2	14	22.24	11.12	311.36	155.68	448	224	10752	0.70
3.4	19.9	14	22.72	11.36	318.08	159.04	448	224	10752	0.71
3.5	20.5	13	23.20	11.60	301.60	150.80	416	208	9984	0.73
3.6	21.1	13	23.68	11.84	307.84	153.92	416	208	9984	0.74
3.7	21.7	12	24.16	12.08	289.92	144.96	384	192	9216	0.76
3.8	22.3	12	24.64	12.32	295.68	147.84	384	192	9216	0.77
3.9	23.0	12	25.12	12.56	301.44	150.72	384	192	9216	0.79
4.0	23.6	12	25.60	12.80	307.20	153.60	384	192	9216	0.80
4.1	24.2	12	26.08	13.04	312.96	156.48	352	176	8448	0.82
4.2	24.9	12	26.56	13.28	318.72	159.36	352	176	8448	0.83
4.3	25.5	11	27.04	13.52	297.44	148.72	352	176	8448	0.85
4.4	26.1	10	27.52	13.76	275.20	137.60	320	160	7680	0.86
4.5	26.8	10	28.00	14.00	280.00	140.00	320	160	7680	0.88



## VersiCore HD Polyiso Insulation

### Packaging & Weight

Product Thickness	Foam Weight	Facer Weight	LBS/PC (4x8)	LBS/SF	LBS/PC (4x4)	LBS/PL (4x8)	LBS/PL (4x4)
0.5	6.0	2.69	8.69	0.2715	4.344	390.96	195.48

## SecurShield HD Polyiso Insulation

### Packaging & Weight

Product Thickness	Foam Weight	Facer Weight	LBS/PC (4x8)	LBS/SF	LBS/PC (4x4)	LBS/PL (4x8)	LBS/PL (4x4)
0.5	6.0	6.40	12.40	0.3875	6.2	558	279

## SecurShield HD Plus Polyiso Insulation

### Packaging & Weight

Product Thickness	Foam Weight	Facer Weight	LBS/PC (4x8)	LBS/SF	LBS/PC (4x4)	LBS/PL (4x8)	LBS/PL (4x4)
0.5	6.0	7.33	13.33	0.4167	6.67	600.05	300.02



# SecurShield HD Composite Polyiso Insulation

## Packaging & Weight

Size	LTR	PCS	LBS/PC	LBS/PAL	LBS/SF
2.00	11.1	24	21.89	525.36	0.684
2.50	13.9	19	24.48	465.12	0.765
3.00	16.9	16	27.07	433.12	0.846
3.50	19.9	13	28.85	375.05	0.901
3.60	20.5	13	29.35	381.55	0.917
4.00	23.0	12	32.29	387.48	1.009

When SecurShield HD Composite with a base foam thickness of greater than 3.5" is specified, Versico recommends the installation of a two layer system with staggered joints.

# DuraFaceR® Polyiso Insulation

## 7/16 OSB Packaging & Weight

Size	Foam	LTR	PCS	LBS/PC	LBS/SF	LBS/PAL
1.5	1.0	6.3	32	52.70	1.646	1686.4
2.0	1.5	9.2	24	55.30	1.728	1327.2
2.5	2.0	12.0	19	57.90	1.809	1100.1
3.0	2.5	15.0	16	60.50	1.890	968.0
3.5	3.0	18.0	13	63.10	1.971	820.3
4.0	3.5	21.1	12	65.70	2.053	788.4



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • [www.versico.com](http://www.versico.com)