


NOTES:

- 1. IN CASE THE THREADED FASTENERS ARE USED TO PENETRATE THE METAL COUNTER-FLASHING, USE EPDM WASHERS, APPLY WATER CUT-OFF MASTIC UNDER THE COUNTER-FLASHING OR SEAL THE FASTENER HEADS WITH SEALANT.
- 2. 3" (7.5cm) FOR UP TO 25 YEARS AND 6" (15cm) FOR 30 YEARS WARRANTY.
- 3. HPV FASTENERS AND POLYMER SEAM PLATES ARE REQUIRED FOR MECHANICALLY—ATTACHED ROOFING SYSTEMS OVER STEEL DECKS.
- 4. IF THE VERTICAL SPLICE ON THE CURB FLASHING IS NOT LOCATED AT THE CORNER, USE DETAIL VGC-2.3 FOR EPDM MEMBRANE SPLICES AT ANGLE CHANGES.



MAXIMUM WARRANTY: 30 YEARS

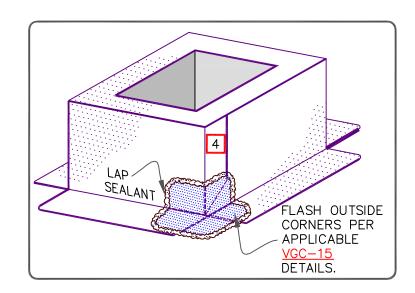

CURB FLASHING — WITH 20 INCH QUICK—APPLIED CURBED FLASHING



0

→ APPROVED SUBSTRATE

→ SEE NOTE(S)

VersiGard COMMON DETAILS (EPDM)

VGC-5.3