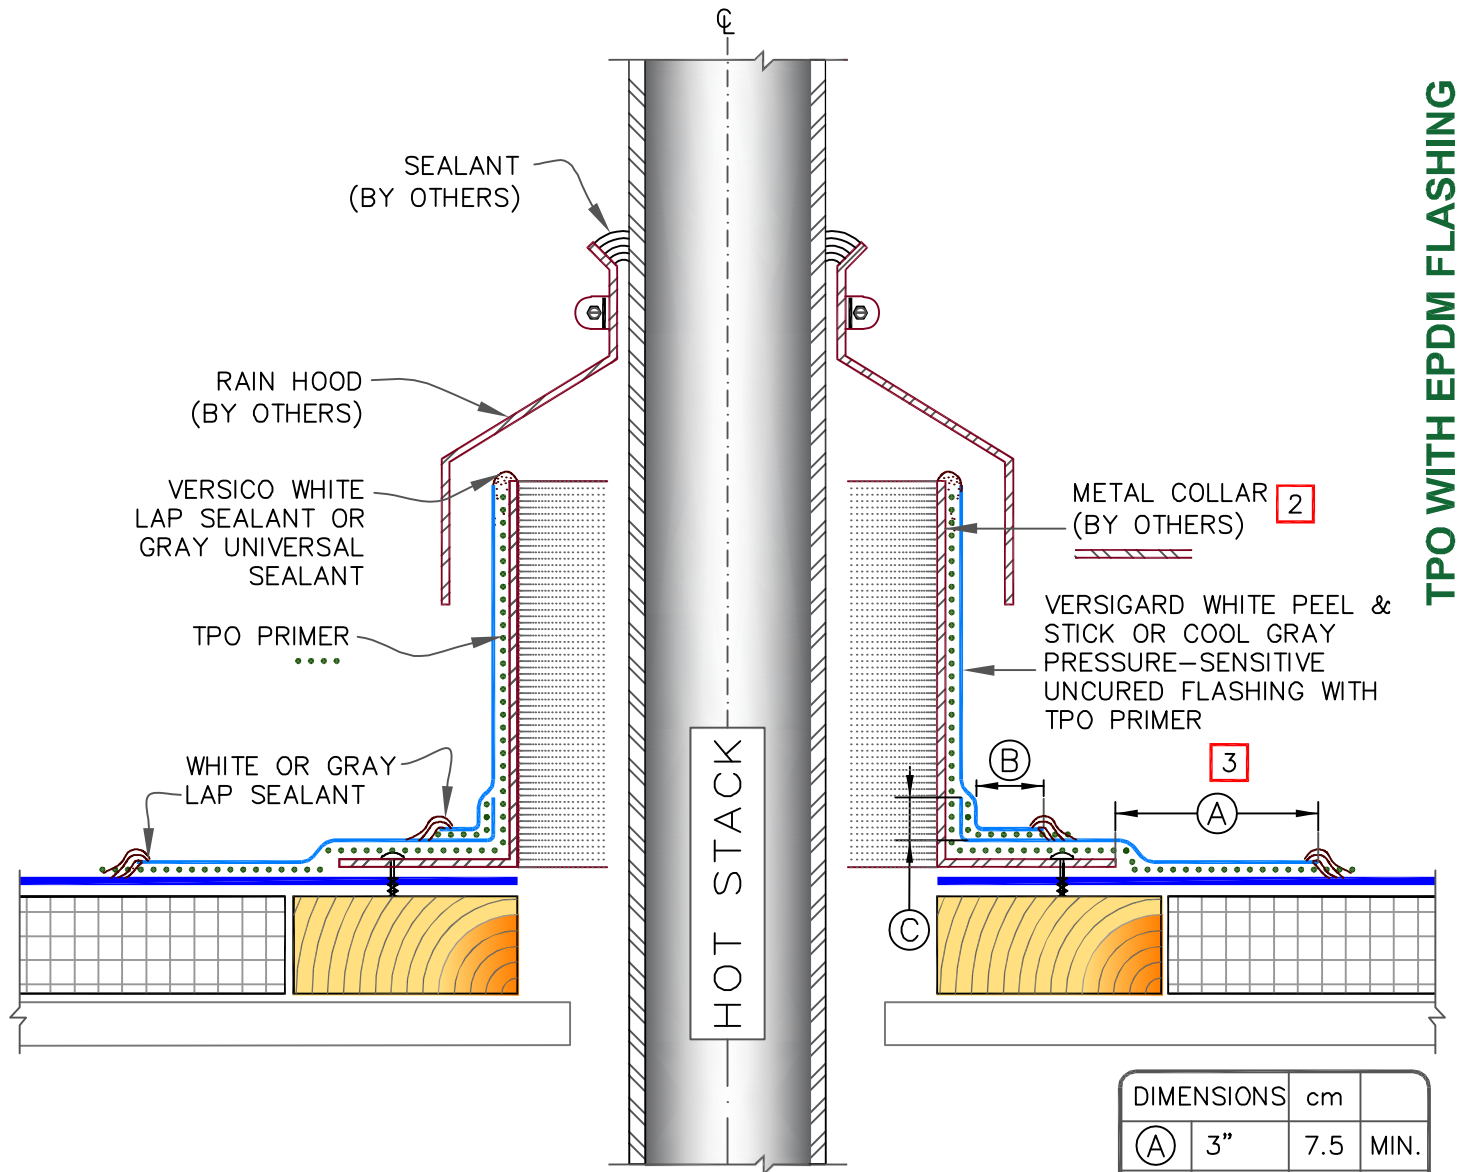


WARRANTY  
REQUIREMENTS

20 YEAR WARRANTY

SEE DETAIL BELOW

25 OR 30 YEAR WARRANTY

REFER TO VERSICO TPO DETAIL [TPC 8.6](#).

| DIMENSIONS |      | cm  |      |
|------------|------|-----|------|
| (A)        | 3"   | 7.5 | MIN. |
| (B)        | 1"   | 2.5 | MIN. |
| (C)        | 1/2" | 1.5 | MIN. |


## NOTES:

1. REMOVE ALL LEAD AND OTHER FLASHING BEFORE INSTALLING FIELD FABRICATED PIPE SEAL.
2. TEMPERATURE OF METAL COLLAR MUST NOT EXCEED 180°F (82°C).
3. TPO PRIMER MUST BE APPLIED TO THE MATING SURFACES PRIOR TO APPLYING VERSIGARD WHITE PEEL & STICK OR COOL GRAY PRESSURE-SENSITIVE UNCURED FLASHING.
4. IN COLDER TEMPERATURES, A HEAT GUN MUST BE USED WHEN FORMING PEEL & STICK UNCURED FLASHING.



HOT STACK: FIELD FABRICATED  
FLASHING WITH VERSIGARD  
UNCURED EPDM

WARRANTY: SEE TABLE ON TOP OF PAGE



PS (PRESSURE  
SENSITIVE)  
P&S (PEEL &  
STICK)  
QA (QUICK  
APPLIED)

THERMOPLASTIC  
ROOFING SYSTEM

TPC-8.4T