


# VERSIWELD QA TPO

## QA TPO Reinforced Membrane

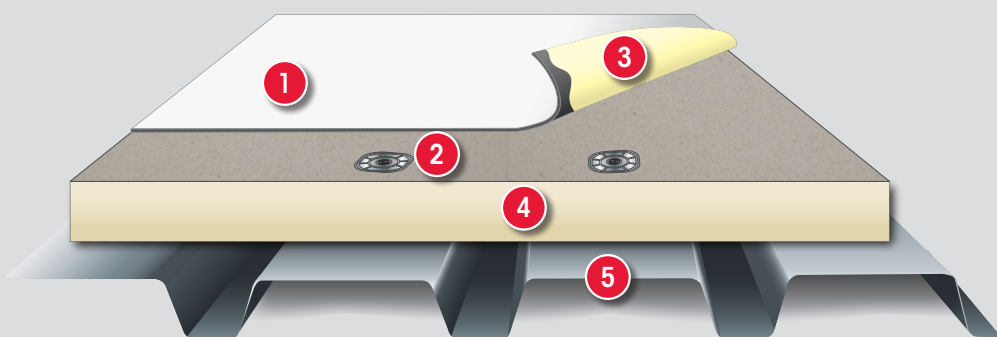

### Typical Application

- 1 VersiWeld® QA TPO Reinforced Membrane
- 2 Versico Insulation Fasteners and Plates
- 3 Pre-Applied Bonding Adhesive
- 4 Approved Versico Insulation
- 5 Approved Roof Deck

Colors	White, Gray and Tan
Standard Thicknesses	60-, 80-mil
Standard Widths	10', 12'
Standard Lengths	50' and 100'

### System Features and Benefits

- Exclusive Lay-Flat Technology provides a wrinkle-free appearance and minimal expansion and contraction of the membrane providing superior performance.
- Consistent adhesive application provides uniform performance.
- No odors or VOCs to disrupt building occupants.
- Provides up to 80% labor savings.
- Cool roofing properties contribute to building envelop energy efficiency.
- Available with optional APEEL Protective Film.
- Versico's cutting-edge adhesion technology enables roofing applications to extend into colder seasons, with effective bonding at low temperatures starting from 25°F and rising.

### VersiWeld QA TPO Membrane

VersiWeld QA TPO is a premium, heat-weldable, single-ply thermoplastic polyolefin membrane, engineered to provide outstanding long-term performance in new roof construction and re-roofing applications. All VersiWeld QA TPO membranes utilize the patented OctaGuard XT™ weathering package technology, which is able to withstand extreme durability testing intended to stimulate exposure to severe climates.

### VersiWeld TPO Accessories

Versico also offers over a dozen prefabricated, in-stock, standard-order accessories, and countless custom-order accessories. All carry a CFA (Certified Fabricated Accessory) stamp of approval, so you know they are manufactured to the highest standards. Every Versico CFA-approved accessory saves time and money during installation.

### Optional APEEL Protective Film

- APEEL Protective Film guards the TPO membrane's surface from scuffs and dirt accumulation during installation, improving the roof system's appearance and long-term performance.
- APEEL Protective Film can be left in place for up to 90 days without degrading due to its excellent heat-and UV-resistance



# VERSIWELD QA TPO



## An Ideal Re-Roofing Solution

**Convenience:** No fumes or odors to disrupt building occupants

**Value:** Up to 80% labor savings to help get the job completed quickly

**Performance:** Highly reflective and energy efficient

## Installation

Versico's VersiWeld QA TPO Fully Adhered Roofing System utilizes white, gray or tan membrane in standard reinforced 60- and 80-mil thicknesses.

Insulation, where required, is secured to an acceptable roof deck. VersiWeld QA TPO membrane sheets are fully adhered to the insulation or substrate with Versico's VersiWeld QA TPO Bonding Adhesive. Adjoining sheets are hot-air welded.

The above information represents a typical Versico VersiWeld QA TPO Fully Adhered Roofing System. Refer to Versico's published specifications and details for more complete information.

## System Codes

- UL Class A, B, and Universal Slope ratings are available over any deck type
- FM uplift values of up to 150 psf can be achieved

For code specifics, refer to Versico's VersiWeld Code Approval Guide.

## Warranty

Consult your Authorized Contractor or Versico Independent Sales Representative or Distributor for associated warranty charges.

Versico's VersiWeld QA systems are backed by our industry leading Total System Warranty. Five to thirty year total system warranties are available with optional hail, puncture and reflectivity warranties available upon request.



Existing or New Deck Type	New Construction						Re-roofing		
	Steel	Plywood or OSB	Lt. Wt. Concrete	Structural Concrete	Wood Planks	Gypsum & Fibrous Cement	Smooth-Surfaced BUR	Gravel-Surfaced BUR	Existing Single-Ply
Insulation Required	Yes	No	Refer to Specs**	No	Yes	Yes	No	Yes	Yes
Recommended Insulations	Versico Polyiso or Versico Polystyrene with an approved cover board								
Insulation Attached By	Flexible DASH™ Adhesive (non-penetrating), Insultite, or Versico HPV Fasteners								
Membrane Attached By	Factory Applied QA Adhesive								

FOR TEAR-OFF OPTIONS REFER TO NEW CONSTRUCTION ABOVE.

For current code approvals and warranties, visit Versico's website or contact a design analyst.

\*\*Refer to Versico's VersiWeld Design Criteria Portion of the Current Specification.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • [www.versico.com](http://www.versico.com)