


SecurWeld METAL TPO Skirted Drip Edge

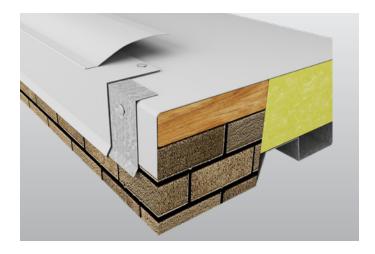

Overview

Carlisle's SecurWeld TPO Skirted Drip Edge features a 22GA L-shaped continuous cleat as well as a TPO coated 24GA metal cover. Additionally, a 60-mil (1.52 mm) 6"-wide, pre-attached, factory-heat-welded TPO membrane flashing skirt facilitates a quicker installation and lowers labor costs. Manufactured in 12' lengths, this product features pre-punched fastening holes for provided fasteners that are slotted to allow for proper thermal movement of materials.

Features and Benefits

- » Manufactured in 12' lengths with pre-punched holes that are slotted to allow for proper thermal movement of materials
- » Factory-applied Carlisle Sure-Weld TPO Flashing saves labor
- » ANSI/SPRI/FM 4435/ES-1 tested to comply with International Building Code requirements
- » Florida Building Code Approved
- » Available in face sizes from 1 1/4" 8", with or without cleat
- » Standard flange width of 3.5"
- » Factory-fabricated miters and accessories ensure a proper fit and provide a cleaner appearance while eliminating the need for field fabrication

Installation

For complete installation instructions, refer to Carlisle specifications and details or visit www.metalera.com/brands/carlisle.

Finishes

Available in any of Carlisle's 3 standard TPO colors including White, Gray, and Tan or 5 special TPO colors including Rock Brown, Slate Gray, Terra Cotta, Patina Green, and Medium Bronze.

Quality Assurance

Tested per ANSI/SPRI ES-1 Test Methods RE-1 and RE-2 for evaluation of membrane securement strength. Fascia shall be certified by Carlisle to design pressures as indicated in current edition of ANSI/SPRI ED-1 Design Standard for Edge Systems Used with Low Slope Roofing Systems. This product meets the requirements of the International Building Code and is Florida Building Code Approved.

Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from Carlisle. Product samples, detail sheets, color chips, and color charts are also available for submittal packages. For assistance with questions or submittals, contact Carlisle or your local manufacturer's representative.

Warranty

Carlisle's SecurWeld TPO Skirted Drip Edge is warranted in conjunction with the roofing system, in an edge to edge warranty up to 30 years with 100mph windspeeds.