


VERSITRIM SNAP-ON CANTED FASCIA

SNAP-ON, SINGLE-PLY VERSION

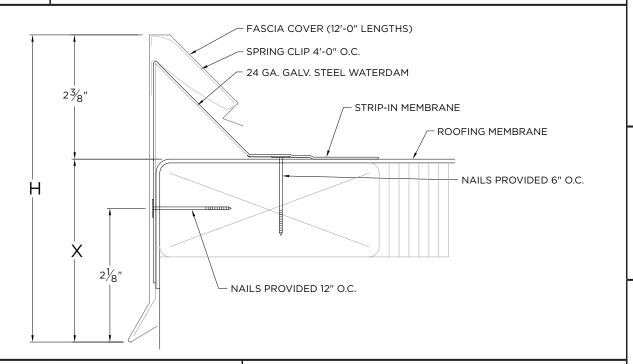

DIMENSIONS

H DIM	X DIM	NAILER COVERAGE
5 1/4"	2 7/8"	1 NAILER
6 3/4"	4 3/8"	2 NAILERS
8 1/4"	5 7/8"	3 NAILERS
9 3/4"	7 3/8"	4 NAILERS
11 1/4"	8 7/8"	5 NAILERS
12 3/4"	10 3/8"	6 NAILERS
	5 1/4" 6 3/4" 8 1/4" 9 3/4" 11 1/4"	5 1/4" 2 7/8" 6 3/4" 4 3/8" 8 1/4" 5 7/8" 9 3/4" 7 3/8" 11 1/4" 8 7/8"

MATERIAL

OTHER:

24 Ga. Galv. Steel	Color:
22 Ga. Galv. Steel	Finish:
☐ .040" Aluminum	Substrate: ☐ Wood
.050" Aluminum	If substrate is not given, wood fasteners Masonry
□.063" Aluminum	will be provided. Metal

Substrate:	☐ Wood
If substrate is not given, wood fasteners	☐ Masonry
will be provided.	☐ Metal

QUANTITIES

Lineal Feet (12'-0" Lengths)	
Outside Miter (90°)	

 Inside Mit	er (90°)

 Right Endcaps
Left Endcaps

 Right Endwall Flashing
Left Endwall Flashing

Accessory	Type:

☐ Quicklock (Default)

□ Welded	(Surcharge)
----------	-------------

_____ Overflow Scupper Style A Style B

Spillout Sc	upper
Style A	Style E

Do	ownspo	ut Scupper
	Style A	Style B

Downspout Sizex
Max. Downspout Size is 5" x 6"
Custom print needed for larger sizes.
Style A=Tapered 1.5" Drop Style B=Flat

NOTES

- Fascia includes splice plate at joints
- Standard fascia will not function with TPO or PVC strip-in membrane thicker than .060"
- Oil canning can occur on larger face heights; recommend .050"" or .063"" for face heights above 8.25"
- Welded accessories require minimum material thickness of .050"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 216 psf

APPROVALS





ANSI/SPRI/FM 4435/ES-1

Test Pressures listed in notes

DDO IECT INEO

PROJECT INFO				
Projec	ct Name:			
Archit	rect:			
Roofing Contractor:				
Proje	ect Type:			
By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be				
	installed in strict	SHT #:	of	

DRN BY: ___JJC

Date: _

CKD BY: MM **Customer Service**

800-558-2162 (Metal-Era)

DWG #: 18010-21545