
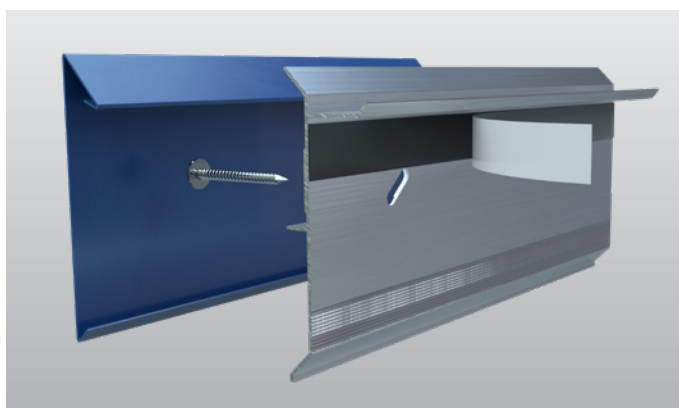


SecurEdge™ 2000 HG Butyl Strip Fascia

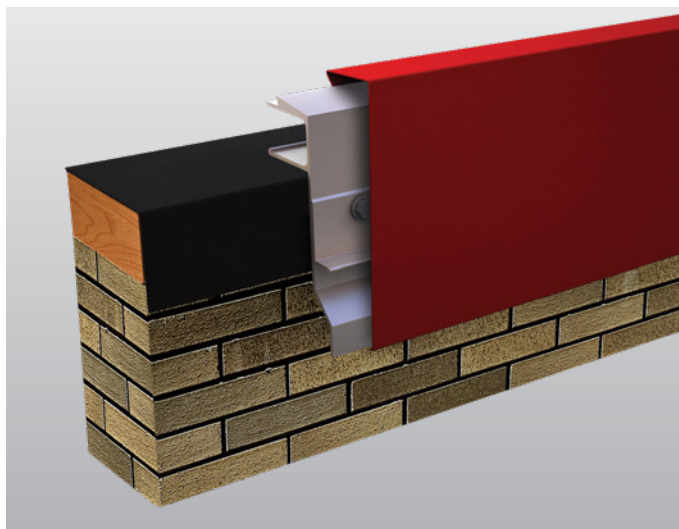

Overview

SecurEdge 2000 HG Fascia with pre-installed, factory-applied butyl strip is designed for a heavier gauge cover and provides your single-ply roof system with the maximum protection against wind up-lift damage and water permeation. Get the reassurance you need that your water cut-off is being applied properly and the convenience of mess free, easy installation. Reduce your water cut-off setup and application time in half with this one of a kind edge metal solution.

Features and Benefits

- » Consistent water cut-off application and protection
- » Reduces water cut-off set-up and application time in half by easily pulling of butyl release liner to install

- » Eliminates messy, time-consuming process of applying water cut-off on job site
- » Designed for EPDM, TPO, and PVC single-ply membrane
- » Part of Full System Warranty
- » ANSI/SPRI/FM 4435/ES-1
- » FM Approved
- » Miami-Dade County Approved
- » Variety of color, sizes and materials
- » Easy installation and decreased labor costs

Warranty

A Full System Warranty is available and covers the entire roof system under one warranty. The system is inspected after the project is complete to assure proper installation. This ensures protection for the most vulnerable area of the roof against failure due to extreme wind up lift pressures. Contact Carlisle for more information.

Typical Properties and Characteristics

Sizes	4", 5.5", 7", 8.5", 10" Provided in 12'-0" lengths Sizes range from 4" up to 10" face heights to accommodate multiple nailers and coverage requirements
Anchor Bar Protection	The patented, extruded aluminum anchor bar securely terminates the membrane. This provides protection unlike any other manufactured or shop-fabricated edge. The anchor bar is readily available to dry-in the roof structure.
Materials	Covers can be manufactured in the following materials: 24 ga. Steel 22 ga. Steel .040" Aluminum .050" Aluminum .063" Aluminum
Design	Pre-punched holes for quicker installation and lower labor costs. Slotted fastening holes allow for thermal movement of the materials and ensure correct fastener placement and spacing.
Finishes	- Natural mill-finish aluminum - Pre-coat Kynar® 500 – from Carlisle's standard color chart - Premium metallic Kynar - Anodized aluminum – clear, bronze, and black - Custom post-painted Kynar finishes available upon request

Typical properties and characteristics are based on samples tested and are not guaranteed for all samples of this product. This data and information is intended as a guide and does not reflect the specification range for any particular property of this product. The pre-applied butyl strip is not included on accessories or the radius fascia.