




Fully Adhered Roofing Systems

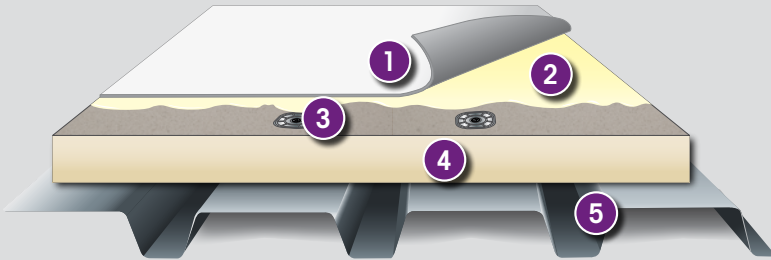

Typical Applications

- 1 VersiFlex PVC Membrane
- 2 Versico Bonding Adhesive
- 3 Versico Fasteners and Plates
- 4 Versico Approved Insulation
- 5 Approved Roof Deck

VersiFlex 5-, 10-, 15-, and 20-year Total System Warranties*

1. Membrane:

50-mil VersiFlex PVC (15-year max.)
 60-mil VersiFlex PVC
 80-mil VersiFlex PVC
 50-mil VersiFlex KEE HP
 60-mil VersiFlex KEE HP
 80-mil VersiFlex KEE HP
 50-mil VersiFlex FRS (15-year max.)
 60-mil VersiFlex FRS
 80-mil VersiFlex FRS

2. Membrane Bonding Adhesive:

VersiFlex PVC Low VOC Bonding Adhesive
 HydroBond Water Based Bonding
 Adhesive(Non-KEE membrane only)
 CAV-GRIP® PVC

3. Versico Insulation Fasteners and Insulation Plates or Adhesive:

Flexible DASH Adhesive
 HPV (steel/wood)
 Insultite (steel/wood)
 ASAP (steel/wood)
 CD-10 (concrete)
 HPVX (steel/wood)
 MP 14-10 (concrete)
 GypTec® (gypsum or cementitious wood fiber)
 Lite-Deck (gypsum or cementitious wood fiber)

4. Cover Board (optional):

SecurShield™ HD
 SecurShield HD Plus
 SECUROCK® Gypsum-Fiber (new construction and tear-offs only)
 DensDeck® Prime (new construction and tear-offs only)
 Recovery Board (15-year max. on re-cover)
 DuraStorm VSH™

5. Versico Approved Insulation:

VersiCore MP-H® Polyiso
 SecurShield Polyiso
 SecurShield HD Composite
 Insulfoam EPS (cover board required)
 Insulfoam EPS Composite
 XPS (cover board required)
 DuraFaceR®
 OPTIM-R® (SecurShield HD cover board required)
 DeckVent (SecurShield insulation required)

6. Vapor Barrier (optional for new construction and tear-offs only):

VapAir Seal™ 725TR (direct to concrete, wood, gypsum, or thermal barrier)
 VapAir Seal MD (direct to metal deck only, fastening of above insulation board required)
 SureMB 90/120TG Base (direct to concrete or thermal barrier only)
 SureMB 90 Base Ply (see Versico Specs and Details)
 Polyethylene (by others, fastening of above insulation board required)
 G2 Base Sheet

7. Thermal Barrier (optional for new construction and tear-offs only, not for use directly over concrete decks):

DensDeck Prime
 SECUROCK Gypsum-Fiber

8. Deck:

22-gauge steel or heavier
 Structural concrete
 Wood plank
 Minimum 15/32" plywood
 Gypsum
 Cementitious wood fiber
 Approved lightweight insulating concrete

9. Metal Edging:

Shop-fabricated metal
 Versico VersiTrim™
 Metal by others
 PVC Pressure-Sensitive Cover Strip

10. Applicable Details:

TPC-1, TPC-2, TPC-3, TPC-5, TPC-6, TPC-8, TPC-9, TPC-12, TPC-13, TPC-15, TPC-16, TPC-18, TPC-20, TPC-24

11. Construction Type:

New construction
 Complete tear-off
 Re-cover (remove and replace wet or damaged insulation prior to installation)

12. Slope:

Positive slope required.

*Buildings up to 100-feet tall with 55-mph wind speed coverage. Projects requiring warranty wind speeds greater than 55 mph should be reviewed by a Versico representative. All products must be supplied by Versico to be included in the warranty coverage. All roof systems can only be accepted upon inspection by a Versico Field Service Representative. Versico reserves the right to change or enhance any of the above components due to specific or unique project conditions. The intent of this document is to verify the proposed roof assembly meets the requested warranty. Versico is not responsible for local and state building code requirements, and any discrepancy should be clarified by the design professional of record. Refer to Versico's most currently published specifications and details for additional information.





Insulation Fastening Rates Up to 5-,10-,15-, and 20-year Warranties

Top layer of insulation ⁵ / coverboard	4' x 8' board ^{2,3}	Bead adhesive spacing for 4' x 4' boards ^{1, 4}	
		Field	Field Perimeter
Minimum 1.5"-thick VersiCore MP-H Polyiso, SecurShield Polyiso, or SecurShield HD Composite Insulation	10	12" o.c.	6" o.c.
Minimum 2.0"-thick VersiCore MP-H Polyiso Insulation	8	12" o.c.	6" o.c.
½"-thick SecurShield HD Plus or DuraStorm VSH	8	12" o.c.	6" o.c.
Minimum ¼"-thick DensDeck Prime or SECUROCK Gypsum-Fiber Roof Board ⁶	12	12" o.c.	6" o.c.
½'-thick SecurShield HD, Min. 1"-thick VersiCore MP-H Polyiso, or Recovery Board ⁶	16	12" o.c.	6" o.c.
1½" DuraFaceR	17	12" o.c.	6" o.c.
OPTIM-R	N/A	12" o.c.	6" o.c.
DeckVent	16	N/A	N/A

¹ Insulation bead spacing shall not exceed 6" on center when adhered directly to steel decking.

² For gypsum and cementitious wood fiber decks, insulation board must be fastened with 16 fasteners and insulation plates per 4' x 8' board. Beads of adhesive shall not exceed 6" on center directly over gypsum and cementitious wood fiber decks.

³ For buildings 51-100' tall, enhance a minimum 12'-wide perimeter with 50% more insulation fasteners and plates.

⁴ Existing roof: insulation bead spacing shall not exceed 6" on center in the field and 4" on center in the perimeters and corners over gravel-surface BUR.

⁵ Minimum of 1.5"-thick insulation is required over existing coal tar pitch.

⁶ Cover boards must be installed over a minimum 1"-thick Versico approved insulation on steel decks.



A SINGLE SOURCE FOR SINGLE-PLY ROOFING

800.992.7663 • www.versico.com