


## NOTES:

1. REFER TO TABLES ON SHEETS **ATTACHMENTS 1 & 2** FOR DETAILED INSPECTION, CLEANING AND PRIMING FOR DIFFERENT MATERIALS WITHIN THE FLASHING AREAS.
2. WOOD NAILER MUST EXTEND PAST TOTAL WIDTH OF SHEET METAL FLANGE.
3. SAME DETAIL APPLIES AT THE TOP OF PARAPET WALL, WHERE FULL COPING IS NOT USED.
4. FASTENERS MUST BE SECURED INTO STRUCTURAL MEMBERS, E.G., CONCRETE, SOLID MASONRY OR WOOD BLOCKING.
5. DETAIL NOT FOR USE ON WARRANTY PROJECTS EXCEEDING 20-YEARS. UNLESS OTHERWISE SPECIFIED.

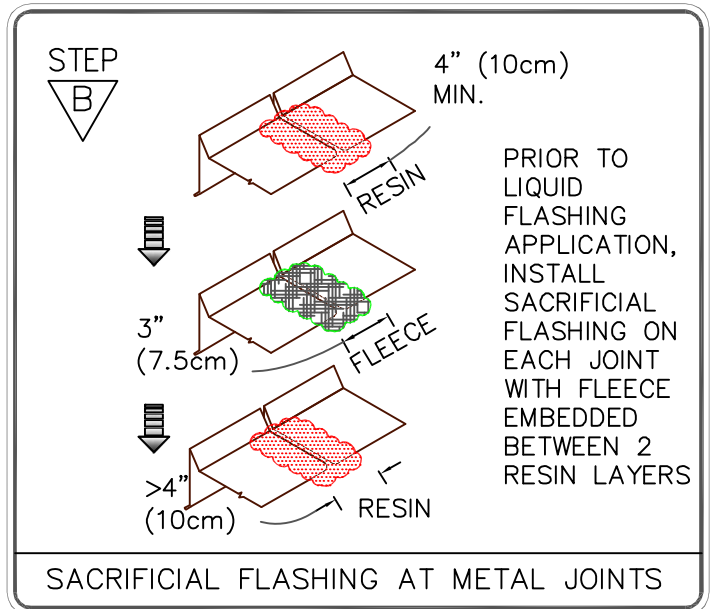

	<p>SHEET METAL DRIP EDGE OR GRAVEL STOP FLASHING</p> <p>For additional information, refer to Specifications</p>	<p>DETAIL NO.</p> <p>LF-1.1</p> <p>LIQUID FLASHING</p>
--	---	--