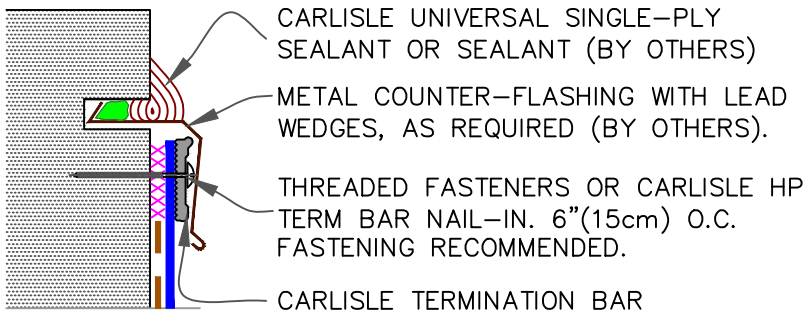



9A

## MECHANICAL TERMINATION WITH COUNTER FLASHING


WARRANTY  
UP TO 30 YEARSSEE INSET  
A

9B

## MECHANICAL TERMINATION

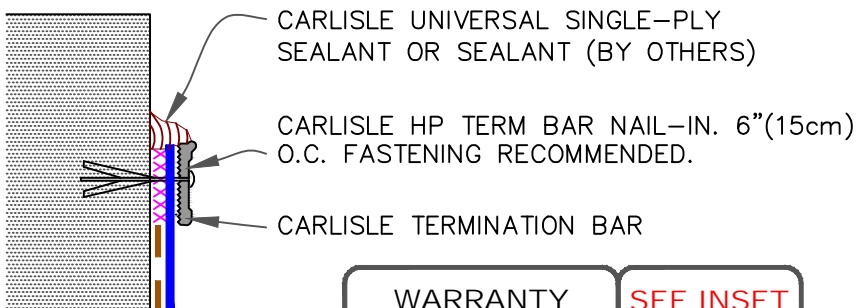WARRANTY  
UP TO 20 YEARSSEE INSET  
A

## INSET A

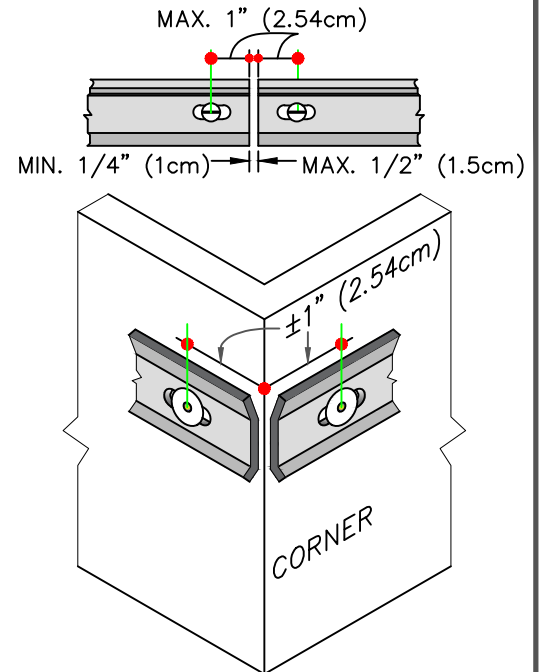


## NOTES:

1. APPLY ON HARD SMOOTH SURFACE ONLY; NOT FOR USE ON EXPOSED WOOD.
2. DO NOT WRAP TERMINATION BAR AROUND CORNERS.
3. DETAIL **9D** MUST BE USED AT VERTICAL JOINTS IN PANEL WALLS.

9C

## COUNTER FLASHING TERMINATION

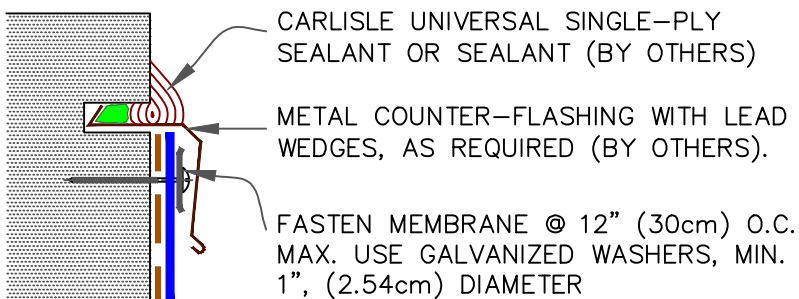

## NOTE:

1. WHEN MECHANICAL FASTENERS ARE USED TO PENETRATE THE METAL COUNTER-FLASHING, USE EPDM WASHERS, APPLY WATER CUT-OFF MASTIC UNDER THE COUNTER-FLASHING OR CAULK THE FASTENER HEADS.

WARRANTY  
UP TO 10 YEARS

— — — — — APPLICABLE BONDING ADHESIVE

xxx WATER CUT-OFF MASTIC— MUST BE HELD UNDER CONSTANT COMPRESSION.

MEMBRANE TERMINATIONS  
(PAGE 1 OF 3)

WARRANTY AS NOTES FOR EACH DETAIL




DETAIL NO.

U-9

U (Universal Detail)

9D

## MECHANICAL TERMINATION AT VERTICAL JOINTS

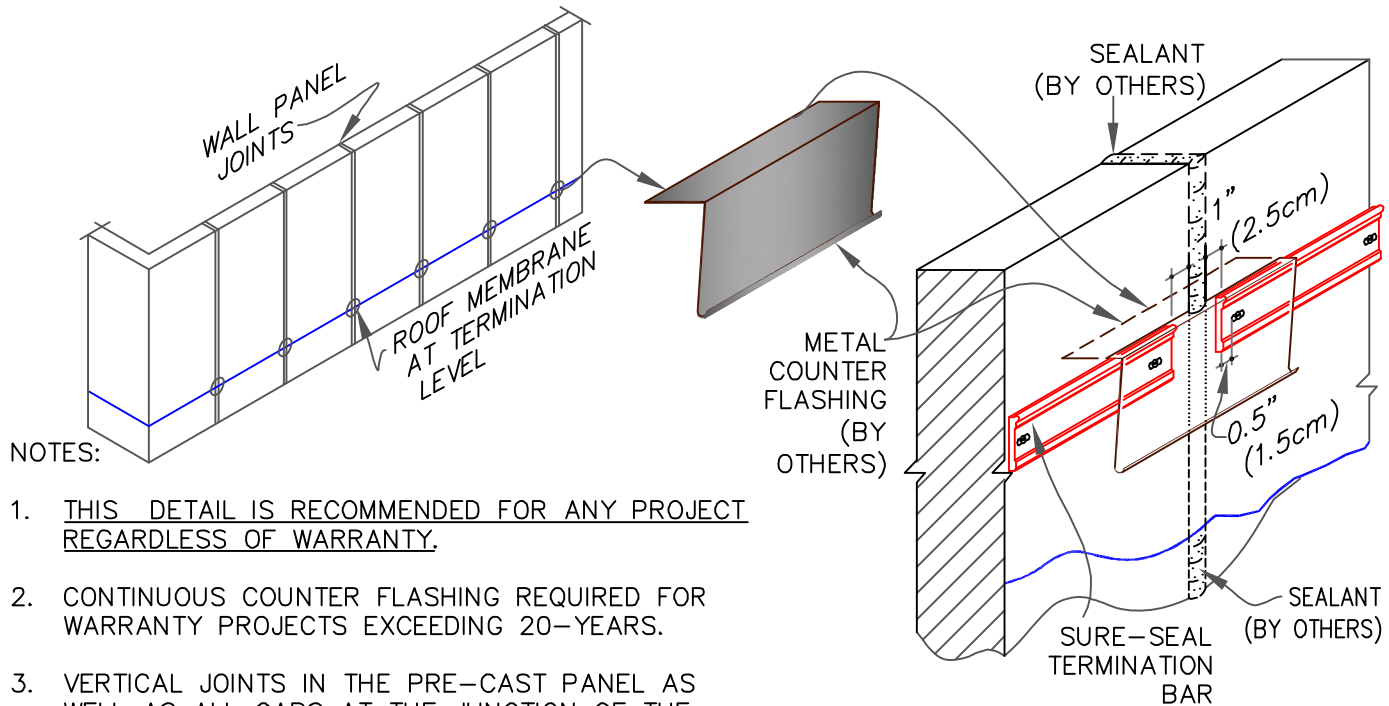

## NOTES:


1. THIS DETAIL IS RECOMMENDED FOR ANY PROJECT REGARDLESS OF WARRANTY.
2. CONTINUOUS COUNTER FLASHING REQUIRED FOR WARRANTY PROJECTS EXCEEDING 20-YEARS.
3. VERTICAL JOINTS IN THE PRE-CAST PANEL AS WELL AS ALL GAPS AT THE JUNCTION OF THE TILT-UP PANEL AND ROOF DECK MUST BE FULLY SEALED TO PREVENT AIR INFILTRATION.
4. APPLY ON HARD SMOOTH SURFACE ONLY.

9E

## SecurEdge &amp; SecurEdge 300 COPINGS

## NOTES:

1. MEMBRANE MUST BE EXTENDED AT CORNERS TO PROVIDE COMPLETE COVERAGE OF THE TOP WALL SURFACE. REFER TO 3D DETAIL ON DETAIL U-9F.
2. REFER TO SecurEdge COPING INSTALLATION INSTRUCTION MANUAL FOR STEP-BY-STEP INSTRUCTION PROCEDURES.

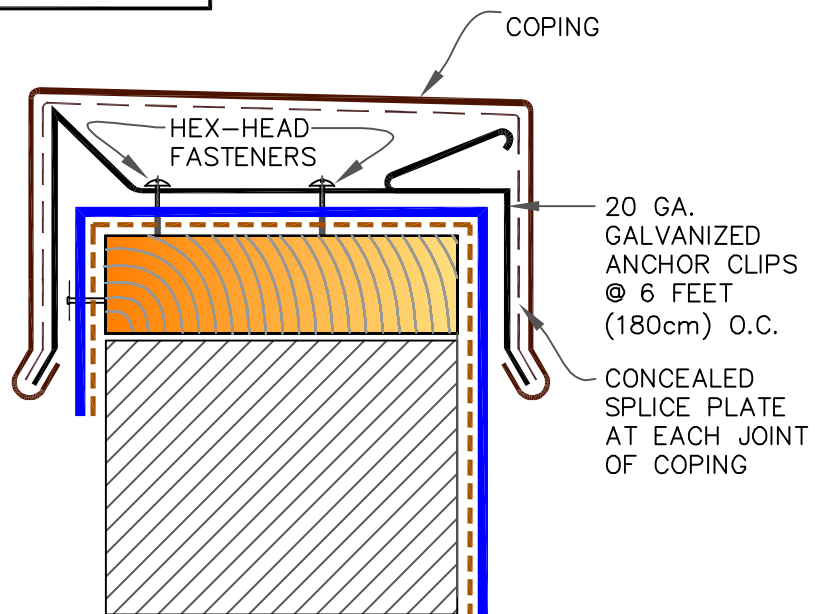

MAXIMUM WARRANTY: 30 YEARS

--- APPLICABLE BONDING ADHESIVE

xxx WATER CUT-OFF MASTIC- MUST BE HELD UNDER CONSTANT COMPRESSION.

MEMBRANE TERMINATIONS  
(PAGE 2 OF 3)

WARRANTY AS NOTES FOR EACH DETAIL





DETAIL NO.

U-9

9F

## SHEET METAL COPING (BY OTHERS)

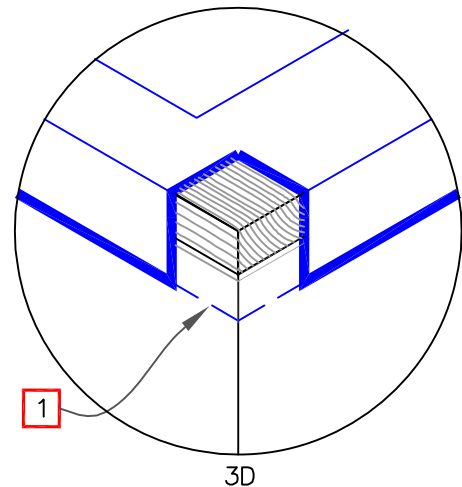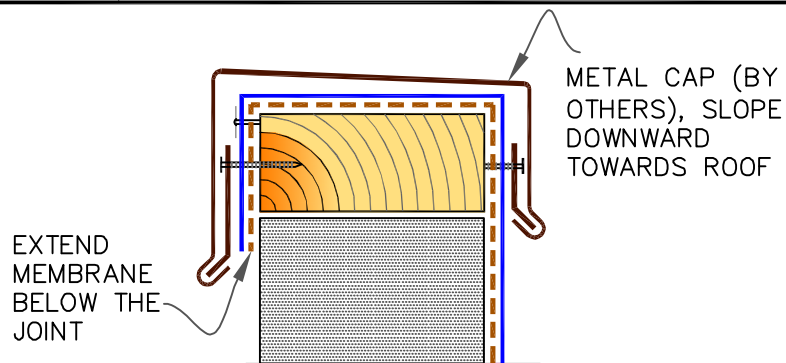


NOTES:

1. MEMBRANE MUST BE EXTENDED TO CORNERS TO PROVIDE COMPLETE COVERAGE OF THE TOP WALL SURFACE.
2. WARRANTY AS PROVIDED (BY OTHERS).

9G

## MASONRY COPINGS (BY OTHERS)

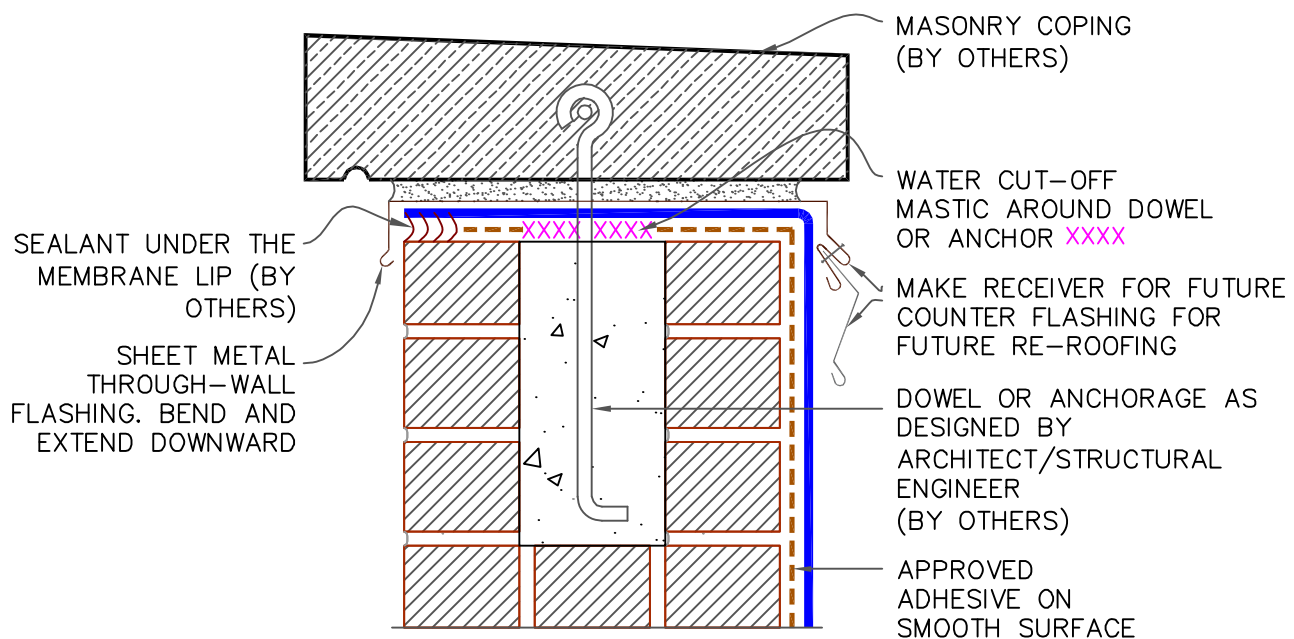

MAXIMUM WARRANTY: 30 YEARS

--- APPLICABLE BONDING ADHESIVE

XXX WATER CUT-OFF MASTIC- MUST BE HELD UNDER CONSTANT COMPRESSION.

MEMBRANE TERMINATIONS  
(PAGE 3 OF 3)

MAXIMUM WARRANTY: 30 YEARS



DETAIL NO.

U-9