


Target Sumps™

Target Sumps ship ready to install, require no field cuts and save valuable time on the roof. Multiple thicknesses and slopes are available to accommodate specific job conditions with no waste, thus reducing disposal fees.

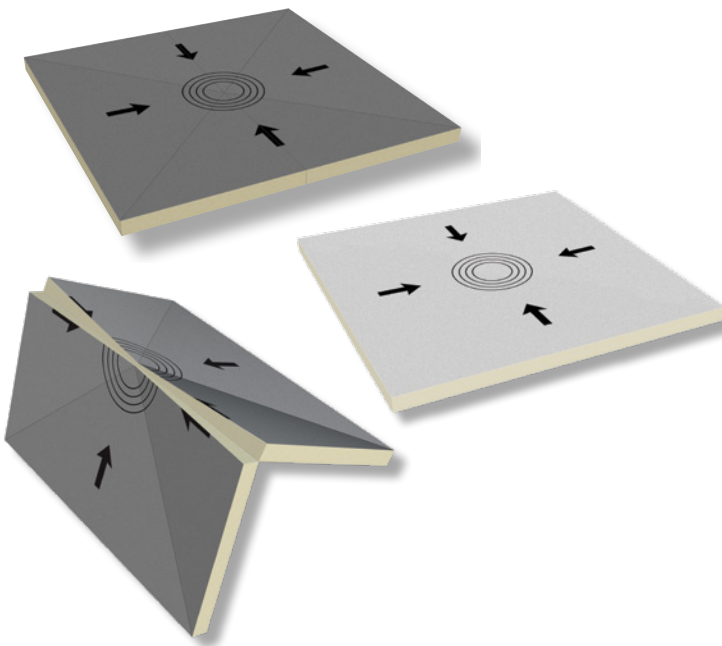

REDUCES FIELD LABOR

- » 8' x 8' Hinged Target Sump ships 4' x 8', folds out to 8' x 8'
- » 4' x 4' Target Sump ships 4' x 4'
- » Pre-cut, ready to install
- » Factory assembled
- » Concentric circles simplify drain cutout

HELPS ELIMINATE WASTE

- » Reduces dumpster fees
- » Reduces impact on local landfills
- » Hinged Target Sumps save 50% in material and waste costs while Target Sumps save 74% over field fabricated sumps

SIZES AVAILABLE FOR OPTIMUM DRAINAGE

- » Multiple thicknesses and slopes to accommodate specific job conditions
- » Additional drain heights achieved by adding base layer material
- » 8' x 8' Hinged Target Sumps are available with Carlisle's Tapered InsulBase® and Tapered SecurShield® performance facers in 25 psi
- » 4' x 4' Target Sumps are available with Carlisle's SecurShield® facer in 25 psi

Standard Hinged Target Sumps (8' x 8' Panel Size)

Slope	Panel	Minimum Thickness	Maximum Thickness	Pieces Per Package	Average R-Value
¼"	X	0.5"	1.5"	14	6.67
	G	1.0"	2.0"	10	9.52
	Y	1.5"	2.5"	8	12.37
½"	Q	0.5"	2.5"	8	10.43
	XX	1.0"	3.0"	6	13.28
¾"	SS	0.5"	2.0"	10	8.55

Target Sumps (4' x 4' Panel Size)

Slope	Panel	Minimum Thickness	Maximum Thickness	Pieces Per Package	Average R-Value
½"	Q1	0.5"	1.5"	30	6.67
	Q2	1.5"	2.5"	18	12.37
	XX1	1.0"	2.0"	22	9.52
	XX2	2.0"	3.0"	15	15.22